



Exova Catalyst, Unit 3, Wednesbury One, Black Country New Road, Wednesbury, WS10 7NZ
Your Exova Catalyst Contact: James Eldridge (07826 916 684)
E: james.eldridge@exova.com

Stack Emissions Testing Report Commissioned by
Xaarjet Ltd

Installation Name & Address

Xaarjet Ltd
1 Hurricane Close
Ermine Business Park
Huntingdon
Cambridgeshire
PE29 6XX

PPC Permit: B22/11

Stack Reference

2 - CR1 Room Extract

Dates of the Monitoring Campaign

28th - 30th January 2019

Job Reference Number

CAT-4655

Report Written by
David Burns Team Leader MCERTS Level 2 MM 05 579 TE1 TE2 TE3 TE4
Report Approved by
Michelle Edwards Team Leader MCERTS Level 2 MM 05 659 TE1 TE2 TE3 TE4
Report Date
12th February 2019
Version
Version 1
Signature of Report Approver


CONTENTS

TITLE PAGE

CONTENTS

EXECUTIVE SUMMARY

Monitoring Objectives	3
Monitoring Results	4
Monitoring Dates & Times	5
Process Details	6
Monitoring & Analytical Methods	7
Summary of Sampling Deviations	7
Sampling Location	8
Plant Photos / Sample Points	9

APPENDIX 1 - Monitoring Personnel & List of Equipment

APPENDIX 2 - Raw Data, Sampling Equations & Charts

Opinions and interpretations expressed herein are outside the scope of Exova Catalyst's ISO 17025 accreditation.

This test report shall not be reproduced, except in full, without the written approval of Exova Catalyst.

Executive Summary

(Page 1 of 7)

MONITORING OBJECTIVES

Xaarjet Ltd, Huntingdon

2 - CR1 Room Extract

28th - 30th January 2019

Overall Aim of the Monitoring Campaign

Exova Catalyst were commissioned by Xaarjet Ltd to carry out stack emissions testing on the 2 - CR1 Room Extract at Huntingdon.

The aim of the monitoring campaign was to demonstrate compliance with a set of emission limit values (ELVs) as specified in the Site's Permit.

Special Requirements

There were no special requirements.

Target Parameters

Total VOCs (as Carbon)

Executive Summary

(Page 2 of 7)

MONITORING RESULTS

Xaarjet Ltd, Huntingdon
2 - CR1 Room Extract
28th - 30th January 2019

where MU = Measurement Uncertainty associated with the Result

		Concentration				Mass Emission				
Parameter		Units	Result	MU +/-	Limit	Units	Result	MU +/-	Limit	
Total VOCs (as Carbon)	¹	mg/m³	2.7	0.44	75	g/hr	5.7	1.0	-	
Stack Gas Temperature		°C	20.4							
Stack Gas Velocity		m/s	8.3							0.28
Volumetric Flow Rate (ACTUAL)		m³/hr	2247							128
Volumetric Flow Rate (REF)	¹	m³/hr	2062							117

NOTE: VOLUMETRIC FLOW RATE & VELOCITY DATA TAKEN FROM THE PRELIMINARY VELOCITY TRAVERSE.

¹ Reference Conditions (REF) are: 273K, 101.3kPa, without correction for water vapour content.

Executive Summary

(Page 3 of 7)

MONITORING DATE(S) & TIMES

Xaarjet Ltd, Huntingdon
 2 - CR1 Room Extract
 28th - 30th January 2019

Parameter		Units	Concentration	Units	Mass Emission	Sampling Date(s)	Sampling Times	Duration mins
Total VOCs (as Carbon)	R1	mg/m³	3.0	g/hr	6.3	28/01/2019	12:20 - 12:50	30
Total VOCs (as Carbon)	R2	mg/m³	2.6	g/hr	5.4	28/01/2019	12:51 - 13:21	30
Total VOCs (as Carbon)	R3	mg/m³	2.6	g/hr	5.3	28/01/2019	13:22 - 13:52	30
Velocity Traverse	R1					28/01/2019	11:08 - 11:22	

All results are expressed at the respective reference conditions.

Executive Summary

(Page 4 of 7)

PROCESS DETAILS

Xaarjet Ltd, Huntingdon
2 - CR1 Room Extract
28th - 30th January 2019

Standard Operating Conditions

Parameter	Value
Process Status	Normal Operation
Capacity (of 100%) and Tonnes / Hour	100% of Capacity
Continuous or Batch Process	Continuous
Feedstock (if applicable)	N/A
Abatement System	N/A
Abatement System Running Status	N/A
Fuel	N/A
Plume Appearance	None Visible

Executive Summary

(Page 5 of 7)

MONITORING & ANALYTICAL METHODS

Xaarjet Ltd, Huntingdon

2 - CR1 Room Extract

28th - 30th January 2019

Parameter	Monitoring				Analysis				MCERTS Testing	LOD (Average)
	Standard	Technical Procedure	ISO 17025 Testing	Testing Lab	Analytical Procedure	Analytical Technique	ISO 17025 Analysis	Analysis Lab		
Total VOCs (as Carbon)	EN 12619:2013	CAT-TP-20	Yes	CAT	Flame Ionisation Detection by Sick 3006 FID				Yes	0.32 mg/m ³
Velocity & Vol. Flow Rate	EN 16911-1 (MID)	CAT-TP-41	Yes	CAT	Pitot Tube and Thermocouple				Yes	1.2 m/s

ANALYSIS LABORATORIES

(with short name reference as appears in the table above)

Exova Catalyst (CAT)	ISO 17025 Accreditation Number: 4279
----------------------	--------------------------------------

SUMMARY OF SAMPLING DEVIATIONS

Parameter	Run	Deviation
All Parameters	All Runs	There are no deviations associated with the sampling employed.

Executive Summary

(Page 6 of 7)

SUITABILITY OF SAMPLING LOCATION

Duct Characteristics

Parameter	Units	Value
Type	-	Circular
Depth	m	0.31
Width	m	-
Area	m ²	0.08
Port Depth	cm	0
Orientation of Duct	-	Vertical
Number of Ports	-	2
Sample Port Size	-	2" Hole

Location of Sampling Platform

General Platform Information	Value
Permanent / Temporary Platform	Permanent
Inside / Outside	Outside

Platform Details

EA Technical Guidance Note M1 / EN 15259 Platform Requirements	Value
Sufficient working area to manipulate probe and operate the measuring instruments	Yes
Platform has 2 levels of handrails (approx. 0.5m & 1.0m high)	Yes
Platform has vertical base boards (approx. 0.25m high)	Yes
Platform has chains / self closing gates at top of ladders	Yes
There are no obstructions present which hamper insertion of sampling equipment	Yes
Safe Access Available	Yes
Easy Access Available	Yes

Sampling Location / Platform Improvement Recommendations

All platforms should be designed in accordance with the requirements in the Environment Agency's Technical Guidance Note M1 and EN 15259.

EN 15259 Homogeneity Test Requirements

There is no requirement to perform a EN 15259 Homogeneity Test on this Stack.

Sampling Plane Validation Criteria (from EN 15259)

Criteria in EN 15259	Units	Traverse 1	Required	Compliant
Lowest Differential Pressure	Pa	45.5	> 5 Pa	Yes
Mean Velocity	m/s	8.27	-	-
Lowest Gas Velocity	m/s	7.29	-	-
Highest Gas Velocity	m/s	8.90	-	-
Ratio of Above	: 1	1.22	< 3 : 1	Yes
Maximum Angle of Swirl	°	NM	NM	NM
No Local Negative Flow	-	Yes	-	Yes

Where NM = Not Measured as no Isokinetic sampling was performed.

Executive Summary

(Page 7 of 7)

PLANT PHOTOS

Photo 1



Photo 2




Photo 3



Photo 4



SAMPLE POINTS

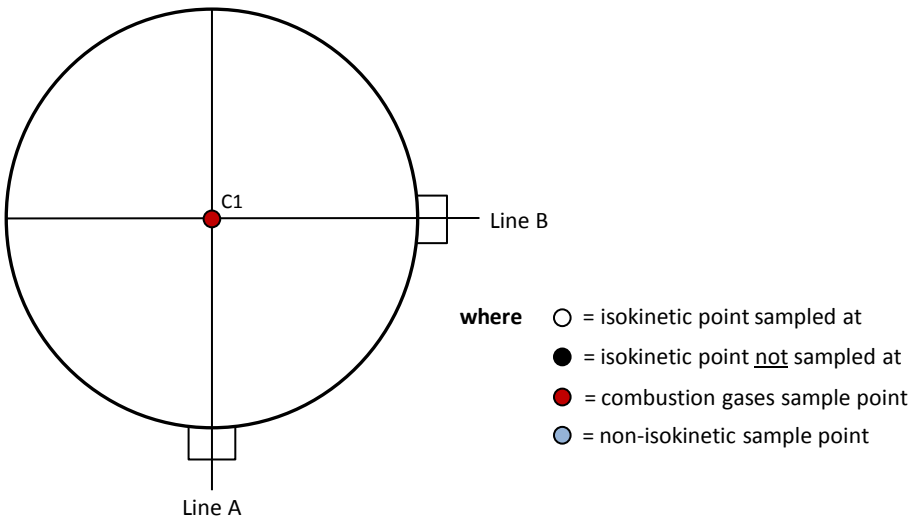

APPENDICES

APPENDIX CONTENTS

APPENDIX 1 - Stack Emissions Monitoring Personnel, List of Equipment & Methods and Technical Procedures Used

APPENDIX 2 - Summaries, Calculations, Raw Data and Charts

STACK EMISSIONS MONITORING PERSONNEL

Position	Name	MCERTS Accreditation	MCERTS Number	Technical Endorsements
Team Leader	David Burns	MCERTS Level 2	MM 05 579	TE1 TE2 TE3 TE4
Trainee	Luke Williams	MCERTS Trainee	MM 18 1496	None

LIST OF EQUIPMENT

Extractive Sampling		Instrumental Analysers		Miscellaneous Items	
Equipment Type	Equipment I.D.	Equipment Type	Equipment I.D.	Equipment Type	Equipment I.D.
Control Box DGM (1)	-	Horiba PG-350E	-	Digital Manometer (1)	CAT 3.143
Control Box DGM (2)	-	Horiba PG-250	-	Digital Manometer (2)	CAT 3.145
Box Thermocouples (1)	-	Servomex 4900	-	Digital Temperature Meter	-
Box Thermocouples (2)	-	Eco Physics CLD 822Mh	-	Stopwatch	CAT 14.86
Umbilical (1)	-	ABB AO2020-URAS26	-	Barometer	CAT 13.41
Umbilical (2)	-	Servomex 5200MP	-	Stack Thermocouple (1)	-
Oven Box (1)	-	Ankersmid APS 313	-	Stack Thermocouple (2)	-
Oven Box (2)	-	Gasmet DX4000	-	Stack Thermocouple (3)	-
Heated Probe (1)	-	Gasmet Sampling System	-	1m Heated Line (1)	-
Heated Probe (2)	-	Bernath 3006 FID	CAT 8.32	1m Heated Line (2)	-
Heated Probe (3)	-	M&C PSS	CAT 12.108	1m Heated Line (3)	-
S-Pitot (1)	-	Mass Flow Controller (1)	-	5m Heated Line (1)	-
S-Pitot (2)	CAT 21S.56	Mass Flow Controller (2)	-	15m Heated Line (1)	-
L-Pitot	CAT 21L.41	Mass View (1)	-	20m Heated Line (1)	CAT 20.119
Site Balance	-	Mass View (2)	-	20m Heated Line (2)	-
500g / 1Kg Check Weights	-	Hioki 5043 (V)	CAT 11.70	Dual Channel Heater Controller	-
Last Impinger Arm	-	Easylogger EN-EL-12 Bit	-	Single Channel Heater Controller	CAT 20.119
Callipers	-	Bioaerosols Temperature Logger	-	Laboratory Balance	-
Tubes Kit Thermocouple	-	Electronic Refrigerator	-	Tape Measure	CAT 16.49

METHODS & TECHNICAL PROCEDURES USED

Parameter	Standard	Technical Procedure
Total VOCs (as Carbon)	EN 12619:2013	CAT-TP-20
Velocity & Vol. Flow Rate	EN 16911-1 (MID)	CAT-TP-41

PRELIMINARY STACK SURVEY: CALCULATIONS

General Stack Details

Stack Details (from Traverse)	Units	Value
Stack Diameter / Depth, D	m	0.31
Stack Width, W	m	-
Stack Area, A	m ²	0.08
Average Stack Gas Temperature, T _a	°C	20.4
Average Stack Gas Pressure	Pa	58.9
Average Stack Static Pressure, P _{static}	kPa	0.116
Average Barometric Pressure, P _b	kPa	99.8
Average Pitot Tube Calibration Coefficient, C _p	-	0.83

Stack Gas Composition & Molecular Weights

Component	Conc ppm	Conc Dry % v/v	Conc Wet % v/v	Volume Fraction r	Molar Mass M	Density kg/m ³ p	Conc kg/m ³ p _i
CO ₂ (Estimated)	-	0.06	0.06	0.0006	44.01	1.9635	0.00118
O ₂ (Estimated)	-	20.80	20.59	0.2080	32.00	1.4277	0.29696
N ₂	-	79.14	78.35	0.7914	28.01	1.2498	0.98913
Moisture (H ₂ O) (Estimated)	-	-	1.00	0.0100	18.02	0.8037	0.00804

NOTE: Moisture has been estimated as no moisture test was performed on the date(s) of testing

Where: $p = M / 22.41$

$p_i = r \times p$

Calculation of Stack Gas Densities

Determinand	Units	Result
Dry Density (STP), P _{STD}	kg/m ³	1.287
Wet Density (STP), P _{STW}	kg/m ³	1.282
Dry Density (Actual), P _{Actual}	kg/m ³	1.181
Average Wet Density (Actual), P _{ActualW}	kg/m ³	1.177

Where: P_{STD} = sum of component concentrations, kg/m³ (not including water vapour)

P_{STW} = sum of all wet concentrations / 100 x density, kg/m³ (including water vapour)

$P_{Actual} = P_{STD} \times (T_{STP} / (P_{STP})) \times ((P_{static} + P_b) / T_a)$

$P_{ActualW} \text{ (at each sampling point)} = P_{STW} \times (T_s / P_s) \times (P_a / T_a)$

Calculation of Stack Gas Volumetric Flowrate, Q

Duct gas flow conditions	Units	Actual	REF ¹
Temperature	°C	20.4	0.0
Total Pressure	kPa	99.9	101.3
Moisture	%	1.00	1.00

Gas Volumetric Flowrate (from Traverse)	Units	Result
Gas Volumetric Flowrate (Actual)	m ³ /hr	2247
Gas Volumetric Flowrate (STP, Wet)	m ³ /hr	2062
Gas Volumetric Flowrate (STP, Dry)	m ³ /hr	2042
Gas Volumetric Flowrate REF ¹	m ³ /hr	2062

PRELIMINARY STACK SURVEY: VELOCITY TRAVERSE TO EN 16911-1 (MID)

(1 of 1)

Parameter	Units	Value
Date of Survey	-	28/01/2019
Time of Survey	-	11:08 - 11:22
Atmospheric Pressure	kPa	99.8
Average Stack Static Pressure	Pa	116
Result of Pitot Stagnation Test	-	Pass
Are Water Droplets Present?	-	No
Device Used	S-Type Pitot with KIMO MP 210 (500Pa)	

Parameter	Units	Value
Initial Pitot Leak Check	-	Pass
Final Pitot Leak Check	-	Pass
Orientation of Duct	-	Vertical
Pitot Tube, C_p	-	0.83
Number of Lines Available	-	2
Number of Lines Used	-	2

Sampling Line A							Sampling Line B					
Traverse Point	Depth m	ΔP Pa	Temp °C	Wet Density kg/m ³	Velocity m/s	Swirl °	ΔP Pa	Temp °C	Wet Density kg/m ³	Velocity m/s	Swirl °	
STATIC (Units: Pa)		119.0					112.0					
Mean		56.7	20.4	1.177	8.10		61.1	20.5	1.177	8.44		
1	0.05	45.5	20.4	1.177	7.29		55.3	20.4	1.177	8.04		
2	0.26	67.8	20.3	1.177	8.90		66.9	20.5	1.177	8.84		

PRELIMINARY STACK SURVEY: VELOCITY TRAVERSE TO EN 16911-1 (MID) - MEASUREMENT UNCERTAINTY

(1 of 1)

Performance characteristics (Uncertainty Components)	Uncertainty	Value	Units
Standard Uncertainty on the coefficient of the Pitot Tube	$u(k)$	0.005	-
Standard Uncertainty associated with the mean local dynamic pressures	$u(\Delta p_i)$	1.236	Pa
- Resolution	$u(res)$	0.00087	
- Calibration	$u(cal)$	0.361	
- Drift	$u(drift)$	0.083	
- Lack of Fit	$u(fit)$	0.082	
- Overall corrections to dynamic measurements	$u(C_f)$	0.527	
Standard uncertainty associated with the molar mass of the gas	$u(M)$	0.00003	-
- $\phi O_2, w$	-	20.592	
- $\phi CO_2, w$	-	0.059	
- Oxygen, dry	$u(\phi O_2, d)$	0.637	
- Carbon Dioxide, dry	$u(\phi CO_2, d)$	0.002	
- Water Vapour	$u(\phi H_2O)$	0.051	
- Oxygen, wet	$u(\phi O_2, w)$	0.630	
- Carbon Dioxide, wet	$u(\phi CO_2, w)$	0.002	
Standard uncertainty associated with the stack temperature	$u(T_c)$	1.497	K
Standard uncertainty associated with the absolute pressure in the duct	$u(p_c)$	175.694	Pa
- Atmospheric Pressure	$u(p_{atm})$	175.692	
- Static Pressure	$u(p_{stat})$	0.874	
Standard uncertainty associated with the density in the duct	$u(\rho)$	0.00635	-
Standard uncertainty associated with the local velocities	$u(v_i)$	0.164	Pa
Standard uncertainty associated with the mean velocity	$u(\bar{v})$	0.145	m/s
Standard uncertainty associated with the mean velocity (95% Confidence)	$U_c(v)$	0.284	m/s
Standard uncertainty associated with the mean velocity (95% Confidence), relative	$U_{c,rel}(v)$	3.43	%
Standard uncertainty associated with the volume flow rate (95% Confidence)	$U_c(qV, w)$	127.6	m ³ /hr
- $u^2(a)/a^2$	-	0.00053	
- $u^2(qV, w)/q^2V, w$	-	0.00084	
- $u^2(qV, w)$	-	4241	
- $u(qV, w)$	-	65.1	
Standard uncertainty associated with the volume flow rate (95% Confidence), relative	$U_{c,rel}(qV, w)$	5.68	%

TOTAL VOCs (as CARBON): RESULTS SUMMARY

Xaarjet Ltd, Huntingdon
2 - CR1 Room Extract

Sample Runs

Parameter	Units	Run 1	Run 2	Run 3	Mean
Concentration	mg/m ³	3.0	2.6	2.6	2.7
Uncertainty	±mg/m ³	0.45	0.44	0.44	0.44
Mass Emission	g/hr	6.3	5.4	5.3	5.7
Uncertainty	±g/hr	1.0	1.0	1.0	1.0

General Sampling Information


Parameter	Value	
Standard	EN 12619:2013	
Technical Procedure	CAT-TP-20	
Probe Material	Stainless Steel	
Filtration Type / Size	0.1µm Glass Fibre	
Heated Head Filter Used	Yes	
Heated Line Temperature	180°C	
Span Gas Type	Propane In Synthetic Air (5 Grade)	
Span Gas Reference Number	CYL 1.0292a	
Span Gas Expiry Date	12/09/2021	
Span Gas Start Pressure (bar)	100	
Gas Cylinder Concentration (ppm)	79.9	
Span Gas Set Point (ppm)	79.90	
Span Gas Uncertainty (%)	2	
Zero Gas Type	Synthetic Air (5 Grade)	
Number of Sampling Lines Used	1 / 1	FORMAT: Number Used / Number Required
Number of Sampling Points Used	1 / 1	FORMAT: Number Used / Number Required
Sample Point I.D.'s	C1	

Reference Conditions

Reference Conditions are: 273K, 101.3kPa, without correction for water vapour content.

TOTAL VOCs (as CARBON): DATA TREND

Graphical Trend of Data

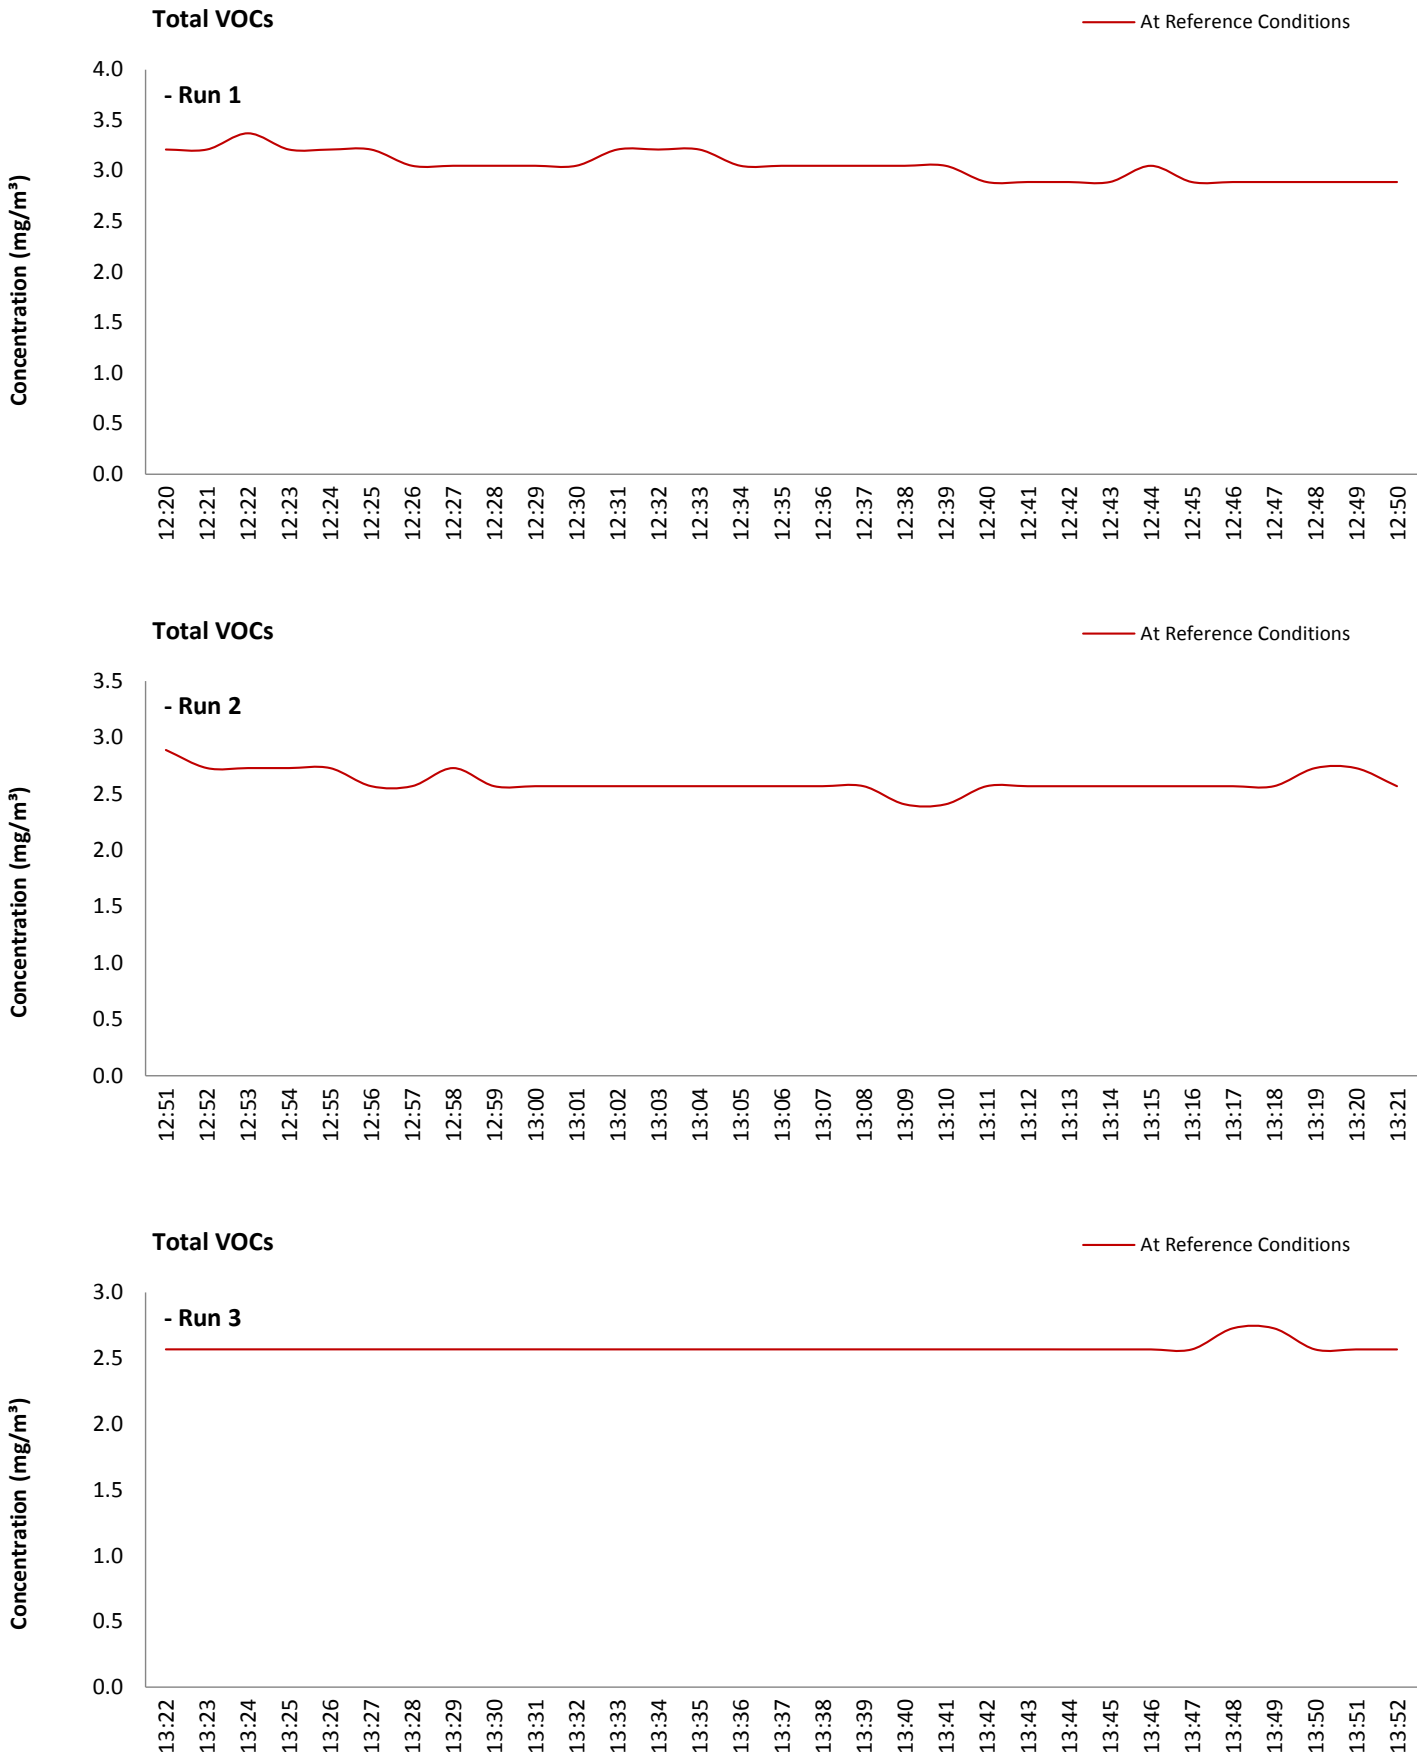

TOTAL VOCs (as CARBON): SAMPLING DETAILS & QUALITY ASSURANCE

Sampling Details

Parameter	Units	Run 1	Run 2	Run 3
Sampling Times	-	12:20 - 12:50	12:51 - 13:21	13:22 - 13:52
Sampling Dates	-	28/01/2019	28/01/2019	28/01/2019
Instrument Range	ppm	100	100	100
Span Gas Value	ppm	79.9	79.9	79.9

Quality Assurance

	Zero Drift	Units	Run 1	Run 2	Run 3
CAL 1	Zero Down Sampling Line (Pre)	ppm	0.00	0.00	0.00
	Zero Down Sampling Line (Post)	ppm	0.00	0.00	0.00
	Zero Drift	ppm	0.00	0.00	0.00
	Allowable Zero Drift	± ppm	4.00	4.00	4.00
	Zero Drift Acceptable	-	Yes	Yes	Yes

	Span Drift	Units	Run 1	Run 2	Run 3
CAL 1	Span Down Sampling Line (Pre)	ppm	79.90	79.90	79.90
	Span Down Sampling Line (Post)	ppm	80.00	80.00	80.00
	Span Drift	ppm	0.10	0.10	0.10
	Allowable Span Drift	± ppm	4.00	4.00	4.00
	Span Drift Acceptable	-	Yes	Yes	Yes

Test Conditions	Units	Run 1	Run 2	Run 3
Run Ambient Temperature Range	°C	3 - 4	3 - 4	3 - 4

Method Deviations

Nature of Deviation (x = deviation applies to the associated run)	Run Number		
	1	2	3
There are no deviations associated with the sampling employed.	x	x	x

TOTAL VOCs (as CARBON): MEASUREMENT UNCERTAINTY CALCULATIONS

Performance characteristics	RUN 1	RUN 2	RUN 3	Units
Limit value	75.0	75.0	75.0	mg/m ³ (REF)
TGN M2 Allowable MU	15.0	15.0	15.0	%
Measured concentration	3.08	2.63	2.60	mg/m ³ (STP, dry)
Range Used	100.0	100.0	100.0	ppm
Range Used [A]	160.6	160.6	160.6	mg/m ³
Cal gas conc.	79.9	79.9	79.9	ppm
Conversion	1.61	1.61	1.61	ppm to mg/m ³
MCERTS Range [B]	15.0	15.0	15.0	mg/m ³
Lower of [A] or [B]	15.0	15.0	15.0	mg/m ³
Cal gas conc.	128.3	128.3	128.3	mg/m ³

Performance characteristics	RUN 1	RUN 2	RUN 3	Units
Response time	45	45	45	seconds
Number of readings in measurement	30	30	30	-
Repeatability at zero	2.00	2.00	2.00	% full scale
Repeatability at span level	0.00	0.00	0.00	% full scale
Deviation from linearity	0.73	0.73	0.73	% of value
Zero drift	0.00	0.00	0.00	% full scale
Span drift	0.13	0.13	0.13	% full scale
Volume or pressure flow dependence	1.60	1.60	1.60	% of full scale
Atmospheric pressure dependence	0.30	0.30	0.30	% of value/kPa
Ambient temperature dependence	1.40	1.40	1.40	% full scale/10K
Combined interference	0.45	0.45	0.45	% range
Dependence on voltage	0.50	0.50	0.50	% full scale/10V
Losses in the line (leak)	0.00	0.00	0.00	% of value
Uncertainty of calibration gas	2.00	2.00	2.00	% of value

Performance characteristic	RUN 1	RUN 2	RUN 3	Units
Standard deviation of repeatability at zero	use rep at span	use rep at span	use rep at span	mg/m ³
Standard deviation of repeatability at span level	0.00	0.00	0.00	mg/m ³
Lack of fit	0.06	0.06	0.06	mg/m ³
Drift	0.00	0.00	0.00	mg/m ³
Volume or pressure flow dependence	0.00	0.00	0.00	mg/m ³
Atmospheric pressure dependence	0.01	0.01	0.01	mg/m ³
Ambient temperature dependence	0.20	0.20	0.20	mg/m ³
Combined interference (from MCERTS Certificate)	0.04	0.04	0.04	mg/m ³
Dependence on voltage	0.06	0.06	0.06	mg/m ³
Losses in the line (leak)	0.00	0.00	0.00	mg/m ³
Uncertainty of calibration gas	0.04	0.03	0.03	mg/m ³

Measurement uncertainty	Result	RUN 1	RUN 2	RUN 3	Units
Combined uncertainty		3.08	2.63	2.60	mg/m ³
Expanded uncertainty	k = 1.96	0.45	0.45	0.45	mg/m ³
Uncertainty corrected to std conds. (O ₂)		0.45	0.45	0.45	mg/m ³ (REF)

	RUN 1	RUN 2	RUN 3	Units
Expanded uncertainty (no O ₂) - at 95% Confidence	14.60	17.04	17.21	% of Value
Expanded uncertainty (no O ₂) - at 95% Confidence	0.60	0.60	0.60	% at ELV
Overall Allowable uncertainty (no O ₂) - at 95% Confidence	15.0	15.0	15.0	% at ELV
Result of Compliance with Uncertainty Requirement in M2	COMPLIANT	COMPLIANT	COMPLIANT	-

	RUN 1	RUN 2	RUN 3	Units
Expanded uncertainty (with O ₂) - at 95% Confidence	N/A	N/A	N/A	% of Value
Expanded uncertainty (with O ₂) - at 95% Confidence	N/A	N/A	N/A	% at ELV
Overall Allowable uncertainty (with O ₂) - at 95% Confidence	N/A	N/A	N/A	% at ELV
Result of Compliance with Uncertainty Requirement in M2	N/A	N/A	N/A	-

Requirement for SRM is that Uncertainty should be <15% of the value at the ELV, on a dry gas basis, or if O₂ correction is applied less than 15% + the uncertainty associated with the O₂ correction (using sqrt of sum squares to add uncertainty components). Ref EA TGN M2.